

COATINGS PLASTICS TONERS INKS COATINGS PLASTICS TONERS INKS

# RAVEN<sup>®</sup> BLACKS


INDUSTRIAL APPLICATIONS REQUIRE POWERFUL SOLUTIONS



A carbon black's application performance is determined by its nature and the level of dispersion achieved. The most important physical and chemical properties include particle size, surface area, porosity, structure, surface chemistry, and physical form. The level of dispersion in any given formulation is strongly influenced by the mixing equipment and procedures used.

**PARTICLE SIZE** exerts a primary influence on color properties. Finer particle size leads to jetter (darker) color and higher viscosity, but requires increased dispersion energy. Particle size is measured by electron microscopy.

**SURFACE AREA** is used for quality control purposes and is a function of



the carbon black's particle size and porosity. Smaller particle diameter gives rise to higher surface area. High surface area is usually associated with greater blackness and higher viscosity.

**POROSITY** is indicated by comparing a carbon black's external surface area predicted by EMSA, and STSA, to the total surface area value obtained with the BET NSA method. High color and conductive carbon blacks tend to have a high degree of porosity.

**STRUCTURE** is a measure of the three-dimensional fusion of carbon black particles to form aggregates. Highly structured carbon blacks provide higher viscosity, greater electrical conductivity and easier dispersion. Measures of aggregate structure may be obtained from shape distributions from EM analysis, or oil absorption (OAN).


**SURFACE CHEMISTRY** of Industrial Carbon Blacks generally refers to the oxygen-containing groups present on a carbon black's surface. Oxidized

surfaces improve wettability, rheology and dispersion in selected vehicle systems. In other cases, oxidation increases electrical resistivity and makes carbon blacks more hydrophilic. The extent of surface oxidation is measured by determining the quantity of the "volatile" component on the carbon black. High volatile levels are associated with low pH. A number of Raven® carbon blacks are post-treated to provide enhanced surface functionality.

**PHYSICAL FORM** is important in matching a carbon black to the equipment by which it is to be dispersed. Powdered carbon blacks are recommended in low-shear dispersers and on three-roll mills. Beaded carbon blacks are recommended for shot mills, ball mills and other high energy equipment. Beading provides lower dusting, bulk handling capabilities, higher bulk densities and improved economics, while powdered carbon blacks offer improved dispersibility.

**FUNDAMENTAL CARBON BLACK PROPERTIES**


Fineness - Particle Size Distribution




Structure - Aggregate Size/Shape Distribution



Porosity - Pore Size Distribution



Surface Chemistry - Surface Functionality Distribution

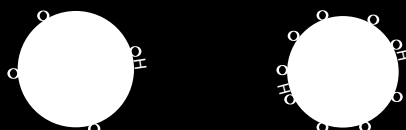

Additional Properties

Other Constituents - Sulfur, Ash, Residue, Etc.

**INFLUENCE OF CARBON PROPERTIES ON APPLICATIONS PERFORMANCE**

Smaller Particle Size (Higher Surface Area)

- Increases Blackness
- Increases Tint
- Increases UV Protection
- Increases Electrical Conductivity
- Increases Vehicle Demand and Viscosity
- Reduces Dispersibility

Higher Structure (Increasing Oil Absorption)

- Reduces Blackness and Tint
- Improves Dispersibility
- Increases Vehicle Demand and Viscosity
- Increases Electrical Conductivity

Higher Porosity (Higher ratio of NSA/STSA)

- Increases Vehicle Demand and Viscosity
- Increases Electrical Conductivity
- Enables Reduced Loadings in Conductive Applications

Higher Surface Functionality (Higher Volatile)

- Improves Vehicle Wetting
- Reduces Viscosity of Liquid Systems
- Lowers Electrical Conductivity

Physical Form - Beads or Powder

TONERS



INK



PLASTICS



COATINGS



Industrial Carbon Blacks are used in a wide variety of applications including printing inks, toners, coatings, plastics, paper and building products. The selection of a specific carbon black application depends on the end product requirements as well as processing conditions.

## INDUSTRIAL CARBON BLACK APPLICATIONS

### ULTRA® INDUSTRIAL CARBON BLACKS

Columbian furnace carbon blacks are high performance carbons which are used in demanding applications. Carbon black purity and consistency of performance, always important, are now recognized as being critical to continuing quality improvement. Columbian, committed to improving its quality and meeting the needs of the customers it serves, has developed furnace carbons that are of the highest purity available. These are referred to as Ultra® carbons.

Ultra® carbon blacks benefit various application systems by providing greater uniformity, increased compatibility, improved dispersion, better processing, longer screen life, better color development, and reduced scrap. Columbian's Ultra® performance carbons are designed for use in critical quality products with cost effective benefits.

**PUREBLACK® Carbons** are a new family of carbon blacks offering exceptional chemical purity and performance. They present unique benefits including negligible moisture pickup, low to nil Sulfur, higher electrical and thermal conductivities, increased oxidation resistance and are compliant with FDA regulation 21 CFR 178.3297. PUREBLACK® Carbons are uniquely suited for moisture sensitive systems and high temperature applications. They provide processing advantages such as ease of dispersion and higher masterbatch loading capability compared to other FDA compliant carbon blacks. In conductive applications including high voltage cables and curing bladders, PUREBLACK® Carbons offer significant performance advantages over acetylene black.

**COATINGS** may be formulated with an extremely wide range of Columbian carbon blacks, ranging from Raven® 410 for low-cost utility finishes to Raven® 5000 Ultra® II & Raven® 5000 Ultra® III for high quality, extremely jet, blue undertone automotive applications. Carbon blacks primarily used for tinting are coarse and have broad particle size distributions. Grades with these properties provide good economics coupled with a desired blue tone and best resistance to flooding and flocculation. For use in machine colorant concentrates, coarse carbon blacks, especially the lampblack replacements are usually specified. Raven® 14, a post-treated lampblack replacement, can provide sufficient mass color, strong tint strength, high loading capability and good dispersibility.

**PLASTICS** carbon black requirements are also diverse. Carbon black may be incorporated into thermosets or thermoplastics for color, tint or functional reasons. The entire spectrum of carbon blacks is employed in mass color plastic applications and use will depend upon loading, dispersion and cost. Again as in coatings, the coarser carbon blacks are excellent choices in applications where blue tone, tint strength, ease of dispersion and high gloss are preferred. Carbon blacks, marketed under the Conductex® trade name, provide different degrees of electrical conductivity for a wide range of plastics requirements. Conductex® 7055 Ultra® offers optimum conductivity with minimal contribution to viscosity in applications such as wire & cable, ESD, as well as conductive coatings. By contrast, oxidized carbon blacks such as Raven® 1255 tend to be less conductive and may be used where controlled electrical insulating properties are required. Fiber applications benefit from the excellent filterability of Raven® 1190 Ultra® and Raven® 1220 Ultra®. For applications requiring very high jetness such as engineering plastics parts, Raven® 2000 and Raven® 2500 Ultra® are recommended.

**INK** grade carbon blacks are generally medium to coarse in particle size and are used for their masstones rather than tint properties. In fluid ink applications such as publication and packaging gravure, Raven® 450 and 460 are widely used because of their rheology, ease of dispersion and blue tone. The standard for news ink applications is Raven® 690 oil beads. High quality paste (oil) inks may be formulated with Raven® 760 Ultra®, 860 Ultra®, 1100 Ultra®, 1000, or 1255 depending on specific requirements.

Numerous Columbian carbon blacks have been specially engineered for specific industries. Raven® H2O is a surfactant-treated carbon black which is extremely hydrophilic and is thus useful in the building product industries for applications such as roofing granules and concrete mortar, and in the paper industry where low shear dispersibility is required. Raven® 1190 Ultra® and Raven® 1220 Ultra® have been developed for the fiber industry. Raven® UV Ultra® is an industry standard for ultra violet protection.



Test Method (*NA - Not Applicable)	D3849	D2414		D6556		2A-700	NA*	D3265	Country of Origin	APPLICATIONS COMMENTS
	Mean Particle Size nm	OAN Oil Absorption cc/100gm Beads	Powder	NSA Surface Area m2/g	STSA Surface Area m2/g	% Volatile	Blackness Index	Tint Strength		
Raven® 7000 <sup>1</sup>	11	95	95	575	300	8.5	170	145	USA	High Color Coatings, Plastics, & Toner
Raven® 5000 Ultra® III <sup>1</sup>	8	95	95	583	350	10.5	190	135	USA	Raven 5000 Ultra III provides added benefit of very high purity
Raven® 5000 Ultra® II <sup>1</sup>	8	95	95	583	350	10.5	190	135	USA	Automotive Topcoat & Engineering Plastics blackest of blacks
Raven® 3600 Ultra®	11	-	130	254	187	1.5	168	147	USA	Ink Jet SOHO applications
Raven® 3500 <sup>1</sup>	13	105	105	375	212	5.0	165	145	USA	Coatings and engineering plastics applications
Raven® 2500 Ultra®	13	65	67	270	206	1.2	168	147	USA	
Raven® 2000	18	65	70	194	168	0.9	166	144	USA	
Raven® 1255 <sup>1</sup>	21	66	66	122	119	2.7	161	135	USA	Premium Offset Inks & Specialty Coatings
Raven® 1250	20	55	60	113	102	2.5	165	128	USA	Coatings and plastics
Raven® 1220 Ultra®	21	77	-	124	112	1.0	132	131	USA	Fiber Applications
Raven® 1200	20	55	60	106	104	1.8	164	128	USA	Coatings and plastics
Raven® 1190 Ultra®	21	57	62	113	100	1.8	162	125	USA	Fiber Applications
Raven® 1700	21	55	60	107	101	1.8	162	124	USA	Inks, coatings and plastics applications
Raven® 1100 Ultra <sup>1</sup>	32	72	72	101	95	2.4	124	120	USA	High quality sheet fed publication inks applications
Raven® 1080 Ultra <sup>1</sup>	28	60	60	79	77	1.6	140	109	USA	High quality heatset inks, sheet fed / offset inks, and coatings applications
Raven® 1060 Ultra <sup>1</sup>	30	50	50	66	65	1.6	128	102	USA	
Raven® 1040	28	100	100	90	86	2.6	139	115	USA	
Raven® 1035 <sup>1</sup>	26	65	65	91	91	2.4	155	125	USA	Ink, coatings and plastics applications
Raven® 1030	24	60	-	95	94	1.5	156	118	USA	
Raven® 1020	24	58	60	95	90	1.5	151	121	USA	
Raven® 1000	24	58	63	92	91	1.9	155	126	USA	Coatings applications
Raven® 890	30	-	102	69	68	1.3	130	97	USA	
Raven® 880 Ultra®	30	102	-	78	76	1.3	128	104	USA	
Raven® 860 Ultra®	39	48	50	48	48	0.7	112	91	USA	Offset inks - strong blue undertone, high loading, ink concentrates
Raven® 850	34	70	75	63	63	1.2	130	101	USA	Coatings, inks, and plastisol applications
Raven® 820	32	120	-	73	71	1.7	118	100	USA	Flexographic Ink applications
Raven® 800 Ultra®	37	48	-	82	75	1.0	107	98	USA	Heatset Ink applications
Raven® 790 Ultra®	30	-	105	64	64	1.2	135	95	USA	Sealant applications
Raven® 785 Ultra®	31	72	-	89	76	0.6	123	105	USA	Toner Applications
Raven® 780 Ultra®	30	58	60	89	77	0.8	134	109	USA	Electrostatic dry toners
Raven® 760 Ultra®	30	48	50	64	64	1.4	128	102	USA	High quality heatset inks, sheet fed/offset inks, and coatings applications
Raven® 520 / Raven® 520 Ultra®	58	121	121	40	39	0.9	95	58	USA	Plastic color concentrates for film, pipe, and injection applications
Raven® 510 / Raven® 510 Ultra®	58	90	-	38	38	0.9	98	57	USA	Coatings - tint applications
Raven® 500	53	75	80	44	44	1.2	100	69	USA	
Raven® 460	63	61	-	37	37	1.0	97	68	USA	
Raven® 450	65	63	65	35	34	1.0	93	61	USA	Gravure Inks
Raven® 430 Ultra®	82	75	78	31	31	1.0	85	58	USA	
Raven® 420	86	72	75	28	28	1.0	79	50	USA	
Raven® 410 / Raven® 410 Ultra®	101	65	68	26	26	0.7	65	47	USA	Plastic color concentrates for film and injection applications, plastic compounds, carbon paper, and powder coating applications. Blue undertone tints, characteristic of lampblack
Raven® 22	83	-	113	28	27	0.8	79	44	USA	
Raven® 16	68	-	105	30	29	0.9	80	46	USA	
Raven® 14 <sup>1</sup>	55	-	111	44	44	1.7	94	66	USA	Blue undertone tints, Carbon Brush applications - lampblack replacement
Conductex® SC Ultra®	20	115	115	205	124	1.5	146	123	USA	Coatings, color concentrates - lampblack replacement
Raven® UV Ultra®	20	114	-	124	112	1.0	142	118	Canada	Conductive applications
Raven® L Ultra®	30	72	-	85	85	1.0	132	110	Canada	UV protection - cable jackets - fiber
Conductex® 7051 Ultra®	56	121	-	43	42	1.0	94	55	Canada	Plastics and ink applications
Conductex® 7055 Ultra®	42	170	-	55	50	1.0	105	61	Canada	Wire & Cable - stripable insulation shield
Raven® M	30	-	108	78	76	0.5	128	104	UK	Wire & Cable, ESD, and other Conductive Applications
Raven® L	30	72	75	79	79	0.5	132	110	UK	Plastics and ink applications
Raven® PFEB	24	98	-	107	91	0.8	143	105	Germany	
Raven® P3	24	115	-	102	97	1.4	137	112	Germany	
Raven® P	22	113	-	155	109	0.9	138	107	Germany	Plastic pipe and fiber applications
Statex® F-12	32	-	110	72	73	1.7	121	105	Brasil	Fiber and engineering plastics applications
Statex® 300	32	-	74	78	80	1.9	125	110	Brasil	Wire & Cable, ESD and other conductive applications
Statex® 125	22	-	125	110	107	1.0	135	116	Brasil	Wire & cable, PVC color concentrates & compounds, inks & coatings applications
Copeblack® 890	18	113	-	140	120	1.4	155	122	Brasil	Medium Color - engineering plastics, masterbatches, PVC compounds, ink & coatings
Copeblack® 690	22	114	-	108	104	0.9	137	115	Brasil	Engineering plastics, PVC color concentrates & compounds, inks and coatings
Copeblack® 450	32	72	-	78	80	0.8	125	110	Brasil	UV protection, plastic color concentrates for film and injection, and letterpress ink applications
Copeblack® 49	58	121	-	38	37	0.7	96	57	Brasil	Medium color - Applications in Plastics (high Loading), Low rub-off newsink.
Copeblack® 35	66	90	-	33	32	0.8	90	57	Brasil	Plastic color concentrates for film and injection applications
Copeblack® 25	100	65	-	29	28	0.8	65	55	Brasil	Plastic color concentrates for film and injection applications, plastic compounds, carbon paper, and powder coating applications. Blue undertone tints, characteristic of lampblack
Raven® P5 Ultra®	25	113	-	105	98	0.7	130	114	Korea	Pipe, film, & fiber
Raven® 880	30	102	-	78	76	1.3	128	104	Korea	Geomembrane film
Raven® UV Ultra®	20	114	-	124	112	1.0	142	118	Korea	UV protection - cable jackets - fiber
Conductex® 7054 Ultra®	56	122	-	43	42	0.5	95	60	Korea	Insulation shield, conductor shield, and ESD
<b>SPECIALTY ADDITIVE - FURNACE CARBON BLACKS</b>										
Raven® 690 <sup>3</sup>	33	82	-	54	54	6.5	120	98	UK	Newsink applications
Raven® H2O <sup>1,2</sup>	55	-	111	45	45	2.2	90	66	USA	Paper, Building materials, low energy dispersion
<b>HIGH PURITY CARBONS</b>										
PUREBLACK® 100 Carbon	80	NA*	-	33	33	0.0	87	58	USA	Compliant with FDA 21CFR 178.3297 for indirect food contact applications. Well suited for high temperature, and moisture sensitive applications
PUREBLACK® 115 Carbon	22	NA*	-	97	97	0.0	160	100	USA	
PUREBLACK® 205 Carbon	42	NA*	-	50	50	0.0	115	54	USA	

1 - Surface oxidized, "Treated" grade treated grades typically range in pH from 3 - 3.5 un-treated grades typically range in pH from 6.5 - 8.0  
2 - Specialty treatment for enhanced dispersion and handling properties  
3 - Volatile Content includes ~6.5% Beading oil  
Ultra indicates carbon black having high purity with exceptionally low levels of ash and residue.  
\* - NA (traditional Oil Absorption test methods do not apply to PUREBLACK® Carbons)  
Note: All data based on the latest and most reliable test methods available at time of publication

FAQs  
Furnace carbon blacks have a  
Furnace carbon black references:

Nominal specific gravity of 1.80  
Color Index No.77266  
Pigment Black 7  
CAS No 1333-86-4

Raven, Statex, Copeblack, Ultra, Conductex, and PUREBLACK are trademarks of Columbian Chemicals Company and/or of its related companies and are registered in the United States or in other countries.

## SALES OFFICES

### BRAZIL

Columbian Chemicals Brasil, Ltda  
Centro Empresarial Água Branca  
Av. Francisco Matarazzo, 1400-8º andar  
Torre Milano  
São Paulo SP CEP:05001-400, Brazil  
55.11.3457-3766  
Fax 55.11.3457-3724

### CANADA

Columbian Chemicals Canada, Ltd.  
P.O. Box 3398 Station C  
755 Parkdale Avenue North  
Hamilton, Ontario L8H 7M2  
1-905.544.3343  
Toronto 1-905.922.3363  
Fax 1-905.544.8641

### ENGLAND

Sevalco, Limited  
Severn Road  
Chittening  
Bristol, BS11 0YU England  
44.117-923.5532  
Admin Fax 44.117.923.5444  
Sales Fax 44.117.923.5333

### GERMANY

Columbian Chemicals Europa GmbH  
Podbielskistr. 160  
D 30179 Hannover, Germany  
49.511.630.890  
Fax 49.511.630.8912

### HUNGARY

Columbian Tiszai Carbon Ltd.  
H-3581 Tiszaújváros  
P.O. Box 61, Hungary  
36.49.544.009  
Fax 36.49.521.230

### ITALY

Columbian Carbon Europa Srl  
Via San Cassiano, 140 28069 San Martino  
di Trecate (NO)  
Italy  
39.0321.7981  
Fax 39.0321.798208

### JAPAN

Columbian Carbon Japan, Ltd.  
8-4 Nihonbashi Horidomecho 2 chome  
Chuo-Ku  
Tokyo 103-0012  
Japan  
81.3.3663.2881  
Fax 81.3.3667.1569

### KOREA

Columbian Chemicals Korea Co., Ltd.  
14th Floor Dukmyong Bldg.  
#170-9, Samsung-Dong  
Kangnam-Gu  
Seoul, Korea 135-741  
82.2.557.2662  
Fax 82.2.557.5362 or 5364

### SPAIN

Columbian Carbon Spain, S.L.  
Carretera Gajano-Pontejos  
39792 GAJANO\_Cantabria  
Apartado 283  
Santander, Spain  
34.942.503030  
Fax 34.942.502165

### UNITED STATES OF AMERICA

Columbian Chemicals Co.  
1800 West Oak Commons Court  
Marietta, Georgia 30062-2253  
1-800.438.6968  
Fax 1-770.792.9625

---

### TECHNICAL INQUIRY TEAM

770-792-9335  
iteam@columbianchemicals.com

---

### HEADQUARTERS

COLUMBIAN CHEMICALS COMPANY  
Headquarters and Technology Center  
1800 West Oak Commons Court  
Marietta, Georgia 30062-2253  
[www.columbianchemicals.com/ContactUs](http://www.columbianchemicals.com/ContactUs)  
1-770.792.9400  
1-800.235.4003  
Fax 1-770.792.9623



[www.columbianchemicals.com](http://www.columbianchemicals.com)

(E) 08.2005

The information presented within this publication is based on the Company's research and the research of others but neither its accuracy nor completeness is guaranteed. THE COMPANY DISCLAIMS ALL REPRESENTATIONS AND WARRANTIES REGARDING ACCURACY, PERFORMANCE, STABILITY, RELIABILITY, OR USE, EXPRESS OR IMPLIED, INCLUDING IMPLIED WARRANTIES OF MERCHANTABILITY AND OF FITNESS FOR A PARTICULAR PURPOSE. The user is responsible for determining the suitability of any product for a specific purpose. No suggestion for use is intended as or should be construed as a recommendation to infringe any existing patent or to violate any federal, state, or local law or regulation. Before handling, using, or processing any material, always read its Material Safety Data Sheet.